Operating Systems and Networks

Network Lecture 8: Transport Layer

Adrian Perrig Network Security Group ETH Zürich I was going to tell you a joke about UDP, but I wasn't sure if you were going to get it ...


- · Starting the Transport Layer!
 - Builds on the network layer to deliver data across networks for applications with the desired reliability or quality

Where we are in the Course




Recall

Transport layer provides end-to-end connectivity across the network

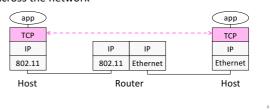

Recall (2)

- Segments carry application data across the network
- Segments are carried within packets within frames



Transport Layer Services

 Provide different kinds of data delivery across the network to applications

	Unreliable	Reliable
Messages	Datagrams (UDP)	
Bytestream		Streams (TCP)

Comparison of Internet Transports

• TCP is full-featured, UDP is a glorified packet

TCP (Streams)	UDP (Datagrams)
Connections	Datagrams
Bytes are delivered once, reliably, and in order	Messages may be lost, reordered, duplicated
Arbitrary length content	Limited message size
Flow control matches sender to receiver	Can send regardless of receiver state
Congestion control matches sender to network	Can send regardless of network state

Socket API

- Simple abstraction to use the network
 - The "network" API (really Transport service) used to write all Internet apps
 - Part of all major OSes and languages; originally Berkeley (Unix) ~1983
- Supports both Internet transport services (Streams and Datagrams)

8

Socket API (2)

<u>Sockets</u> let apps attach to the local network at different <u>ports</u>



Socket API (3)

· Same API used for Streams and Datagrams

	Primitive	Meaning	
	SOCKET	Create a new communication endpoint	
	BIND	Associate a local address (port) with a socket	
Only needed for Streams To/From forms for Datagrams	LISTEN	Announce willingness to accept connections	
	ACCEPT	Passively establish an incoming connection	
	CONNECT	Actively attempt to establish a connection	
	SEND(TO)	Send some data over the socket	
	RECEIVE(FROM)	Receive some data over the socket	
	CLOSE	Release the socket	

10


Ports


- Application process is identified by the tuple IP address, protocol, and port
 - Ports are 16-bit integers representing local "mailboxes" that a process leases
- Servers often bind to "well-known ports"
 - <1024, require administrative privileges
- Clients often assigned "ephemeral" ports
 - Chosen by OS, used temporarily

11

Some Well-Known Ports

Port	Protocol	Use
20, 21	FTP	File transfer
22	SSH	Remote login, replacement for Telnet
25	SMTP	Email
80	HTTP	World Wide Web
110	POP-3	Remote email access
143	IMAP	Remote email access
443	HTTPS	Secure Web (HTTP over SSL/TLS)
543	RTSP	Media player control
631	IPP	Printer sharing

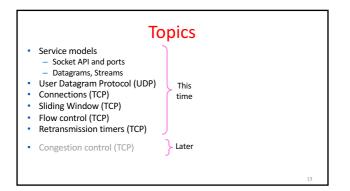

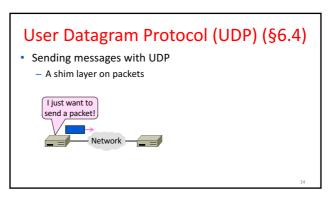


User Datagram Protocol (UDP)


- Used by apps that don't want reliability or bytestreams
 - Voice-over-IP (unreliable)
 - DNS, RPC (message-oriented)
 - DHCP (bootstrapping)

(If application wants reliability and messages then it has work to do!)

Client (host 1) Time Server (host 2)

request
reply

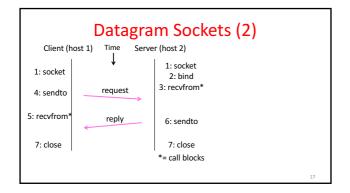

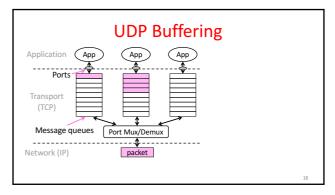

UDP Header

- Uses ports to identify sending and receiving application processes
- Datagram length up to 64K
- Checksum (16 bits) for reliability




UDP Pseudoheader

- Optional checksum covers UDP segment and IP pseudoheader
 - Checks key IP fields (addresses)
 - Value of zero means "no checksum"



Connection Establishment (6.5.5, 6.5.7, 6.2.2)

- · How to set up connections
 - We'll see how TCP does it



21


Connection Establishment

- Both sender and receiver must be ready before we start the transfer of data
 - Need to agree on a set of parameters
 - e.g., the Maximum Segment Size (MSS)
- This is signaling
 - It sets up state at the endpoints
 - Like "dialing" for a telephone call

22


Three-Way Handshake

- Used in TCP; opens connection for data in both directions
- Each side probes the other with a fresh Initial Sequence Number (ISN)
 - Sends on a SYNchronize segment
 - Echo on an ACKnowledge segment
- Chosen to be robust even against delayed duplicates




Three-Way Handshake (2)

- Three steps:
 - Client sends SYN(x)
 - Server replies with SYN(y)ACK(x+1)
 - Client replies with ACK(y+1)
 - SYNs are retransmitted if lost
- Sequence and ack numbers carried on further segments




Three-Way Handshake (3)

- Suppose delayed, duplicate copies of the SYN and ACK arrive at the server!
 - Improbable, but anyhow ...




Three-Way Handshake (4)

- Suppose delayed, duplicate copies of the SYN and ACK arrive at the server!
 - Improbable, but anyhow ...
- Connection will be cleanly rejected on both sides ©




TCP Connection State Machine

· Captures the states (rectangles) and transitions (arrows)

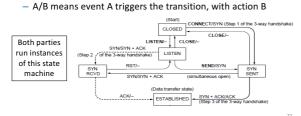


TCP Connections (2)

• Follow the path of the client:

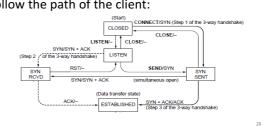

TCP Connections (3)

• And the path of the server:

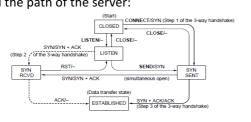

TCP Connections (4)


· Again, with states ... Active party (client) Passive party (server) CLOSED CLOSED SYN_SENT LISTEN SYN_RCVD ESTABLISHED ESTABLISHED

TCP Connections (5)

- · Finite state machines are a useful tool to specify and check the handling of all cases that may occur
- TCP allows for simultaneous open
 - i.e., both sides open at once instead of the client-server pattern
 - Try at home to confirm it works ☺

Connection Release (6.5.6-6.5.7, 6.2.3)

- · How to release connections
 - We'll see how TCP does it




Connection Release


- · Orderly release by both parties when done
 - Delivers all pending data and "hangs up"
 - Cleans up state in sender and receiver
- · Key problem is to provide reliability while releasing
 - TCP uses a "symmetric" close in which both sides shutdown independently

TCP Connection Release

- Two steps:
 - Active party sends FIN(x), passive party sends ACK
 - Passive party sends FIN(y), active party sends ACK
 - FINs are retransmitted if lost
- Each FIN/ACK closes one direction of data transfer




TCP Connection State Machine

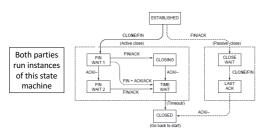

TCP Release

Follow the active party

TCP Release (2) • Follow the passive party CLOSEFIN FINACK CLOSEFIN FINACK CLOSEFIN FINACK CLOSEFIN FINACK CLOSEFIN CLOSEFIN

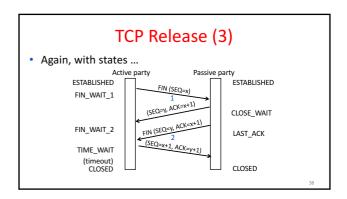


TIME_WAIT State

- We wait a long time (two times the maximum segment lifetime of 60 seconds) after sending all segments and before completing the close
- Why?
 - ACK might have been lost, in which case FIN will be resent for an orderly close
 - Could otherwise interfere with a subsequent connection

Sliding Windows (§3.4, §6.5.8)


- The sliding window algorithm
 - Pipelining and reliability
 - Building on Stop-and-Wait



40

Recall

 ARQ with one message at a time is Stop-and-Wait (normal case below)



Limitation of Stop-and-Wait

- It allows only a single message to be outstanding from the sender:
 - Fine for LAN (only one frame fit)
 - Not efficient for network paths with BD >> 1 packet



Limitation of Stop-and-Wait (2)

- Example: R=1 Mbps, D = 50 ms
 - RTT (Round Trip Time) = 2D = 100 ms
 - How many packets/sec?
 - What if R=10 Mbps?

Sliding Window

- · Generalization of stop-and-wait
 - Allows W packets to be outstandingCan send W packets per RTT (=2D)



- Pipelining improves performance
- Need W=2BD to fill network path

Sliding Window (2)

- What W will use the network capacity?
- Ex: R=1 Mbps, D = 50 ms
- Ex: What if R=10 Mbps?

45

Sliding Window (3)

- Ex: R=1 Mbps, D = 50 ms
 - $-2BD = 10^{\frac{1}{6}} \text{ b/sec} \times 100. \ 10^{-3} \text{ sec} = 100 \text{ kbit}$
 - W = 2BD = 10 packets of 1200 bytes



- Ex: What if R=10 Mbps?
 - 2BD = 1000 kbit
 - W = 2BD = 100 packets of 1200 bytes


46

Sliding Window Protocol

- Many variations, depending on how buffers, acknowledgements, and retransmissions are handled
- Go-Back-N
 - Simplest version, can be inefficient
- Selective Repeat
 - More complex, better performance


Sliding Window - Sender

- Sender buffers up to W segments until they are acknowledged
 - LFS=LAST FRAME SENT, LAR=LAST ACK REC'D
 - Sends while LFS LAR ≤ W




Sliding Window - Sender (2)

- Transport accepts another segment of data from the Application ...
 - Transport sends it (as LFS–LAR → 5)



Sliding Window – Sender (3)

- · Next higher ACK arrives from peer...
 - Window advances, buffer is freed
 - LFS-LAR → 4 (can send one more)



Sliding Window - Go-Back-N

- Receiver keeps only a single packet buffer for the next segment
 - State variable, LAS = LAST ACK SENT
- On receive:
 - If seq. number is LAS+1, accept and pass it to app, update LAS, send ACK
 - Otherwise discard (as out of order)

51

Sliding Window - Selective Repeat

- Receiver passes data to app in order, and buffers out-of-order segments to reduce retransmissions
- ACK conveys highest in-order segment, plus hints about out-oforder segments
- TCP uses a selective repeat design; we'll see the details later

52

Sliding Window - Selective Repeat (2)

- Buffers W segments, keeps state variable, LAS = LAST ACK SENT
- On receive:
 - Buffer segments [LAS+1, LAS+W]
 - Pass up to app in-order segments from LAS+1, and update LAS
 - Send ACK for LAS regardless

53


Sliding Window – Retransmissions


- Go-Back-N sender uses a single timer to detect losses
 - On timeout, resends buffered packets starting at LAR+1
- Selective Repeat sender uses a timer per unacked segment to detect losses
 - On timeout for segment, resend it
 - Hope to resend fewer segments


Sequence Numbers

- Need more than 0/1 for Stop-and-Wait ...
- For Selective Repeat, need W numbers for packets, plus W for acks of earlier packets

 - 2W seq. numbersFewer for Go-Back-N (W+1)
- Typically implement seq. number with an N-bit counter that wraps around at $2^{N}\!\!-\!\!1$
 - E.g., N=8: ..., 253, 254, 255, 0, 1, 2, 3, ...

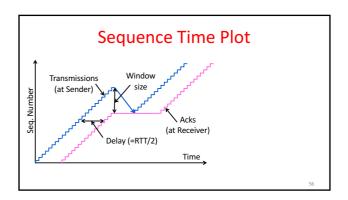

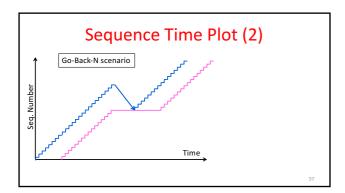

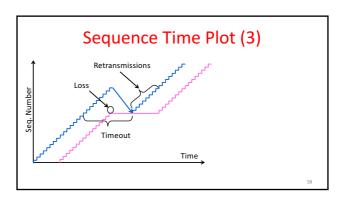


Flow Control (§6.5.8) · Adding flow control to the sliding window algorithm Please slow down!


- To slow the over-enthusiastic sender


Problem Sliding window uses pipelining to keep the network busy - What if the receiver is overloaded? Wee Mobile


Sliding Window — Receiver • Consider receiver with W buffers - LAS=LAST ACK SENT, app pulls in-order data from buffer with recv() call Sliding W=5 Window W=5 LAS Acceptable Too high ... LAS seq. number

Sliding Window — Receiver (2) • Suppose the next two segments arrive but app does not call recv() W=5 Acceptable ... Finished LAS Acceptable seq. number

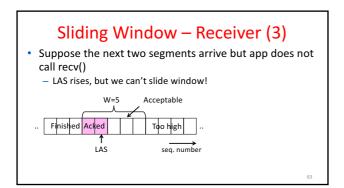


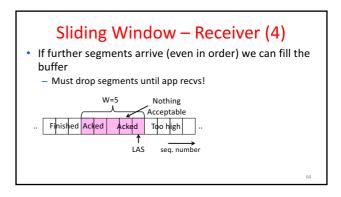

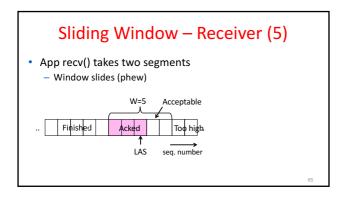

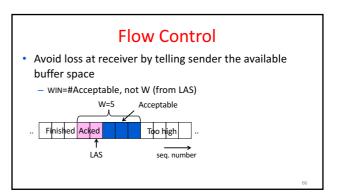


Flow Control (2) • Sender uses the lower of the sliding window and flow control window (WIN) as the effective window size WIN=3 ... Finished Acked Too high ... seq. number

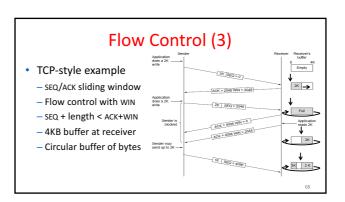


Retransmission Timeouts (§6.5.9)

- How to set the timeout for sending a retransmission
 - Adapting to the network path




Retransmissions


- With sliding window, the strategy for detecting loss is the <u>timeout</u>
 - Set timer when a segment is sent
 - Cancel timer when ack is received
 - If timer fires, <u>retransmit</u> data as lost




Timeout Problem

- Timeout should be "just right"
 - Too long wastes network capacity
 - Too short leads to spurious resends
 - But what is "just right"?
- Easy to set on a LAN (Link)
 - Short, fixed, predictable RTT
- Hard on the Internet (Transport)
 - Wide range, variable RTT

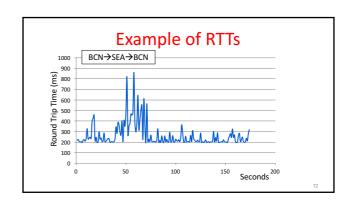


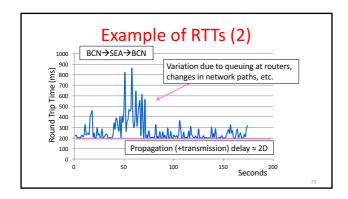


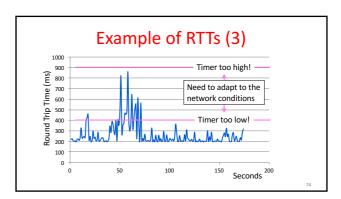

Adaptive Timeout


- Keep smoothed estimates of the RTT (1) and variance in RTT (2)
 - Update estimates with a moving average
 - 1. $SRTT_{N+1} = 0.9*SRTT_N + 0.1*RTT_{N+1}$
 - 2. $Svar_{N+1} = 0.9*Svar_N + 0.1*|RTT_{N+1} SRTT_{N+1}|$
- · Set timeout to a multiple of estimates
 - To estimate the upper RTT in practice
 - TCP Timeout_N = SRTT_N + 4*Svar_N

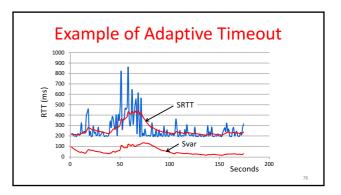


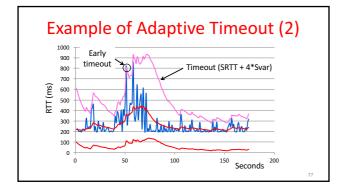



Adaptive Timeout (2)


- Simple to compute, does a good job of tracking actual RTT
 - Little "headroom" to lower
 - Yet very few early timeouts
- Turns out to be important for good performance and robustness

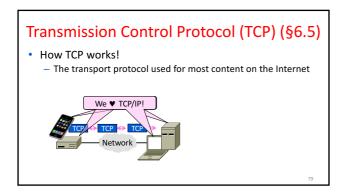


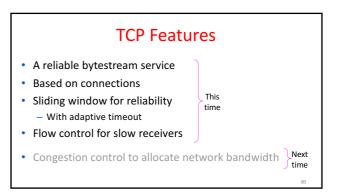

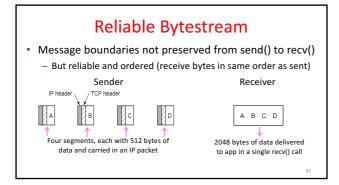

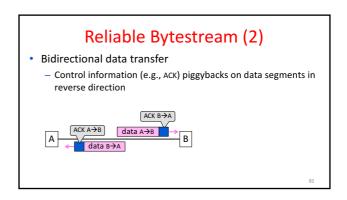


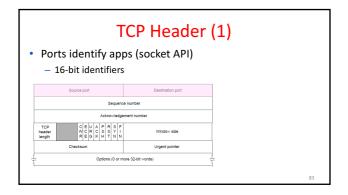

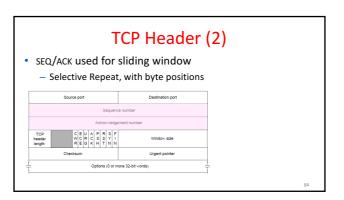

TCP Sliding Window – Receiver

- <u>Cumulative ACK</u> tells next expected byte sequence number ("LAS+1")
- Optionally, <u>selective ACKS</u> (SACK) give hints for receiver buffer state
 - List up to 3 ranges of received bytes



TCP Sliding Window – Sender Uses adaptive retransmission timeout to resend data from LAS+1 Uses heuristics to infer loss quickly and resend to avoid timeouts "Three duplicate ACKS" treated as loss ACK 100 ACK 100 ACK 100, 200-399 200-499 Sender decides 100-199 is lost

TCP Header (3)

- SYN/FIN/RST flags for connections
 - Flag indicates segment is a SYN etc.



TCP Header (4)

- Window size for flow control
 - Relative to ACK, and in bytes



88

Other TCP Details

- Many, many quirks you can learn about its operation
 - But they are the details
- Biggest remaining mystery is the workings of congestion control
 - We'll tackle this next time!