




ETH zürich  

ADRIAN PERRIG & TORSTEN HOEFLER
Networks and Operating Systems (252-0062-00)
Chapter 3: Scheduling

Stack Overflow Could Explain Toyota Vehicles' Unintended Acceleration



timothy posted 4 days ago | from robertschin



Stack Overflow

Page 13 | 2007 | @DataLabs | CC BY-NC-ND | via Internet Archive



New subscriber robertschin writes "Michael Barr recently testified in the *Bookout v. Toyota Motor Corp.* lawsuit that the likely cause of unintentional acceleration in the Toyota Camry may have been caused by a stack overflow. Due to recursion overwriting critical data past the end of the stack and into the real time operating system memory area, the throttle was left in an open state and the process that controlled the throttle was terminated. How can users protect themselves from sometimes life endangering software bugs?"
 Source: slashdot, Feb. 2014

ETH zürich  

Last time

- Process concepts and lifecycle
- Context switching
- Process creation
- Kernel threads
- Kernel architecture
- System calls in more detail
- User-space threads

2

ETH zürich  



Scheduling is...

Deciding how to allocate a single resource among multiple clients

- In **what order** and for **how long**
- **Usually refers to CPU scheduling**
 - Focus of this lecture – we will look at selected systems/research
 - OS also schedules other resources (e.g., disk and network IO)
- **CPU scheduling involves deciding:**
 - Which task next on a given CPU?
 - For how long should a given task run?
 - On which CPU should a task run?

Task: process, thread, domain, dispatcher, ...



3

ETH zürich  

Scheduling

- **What metric is to be optimized?**
 - Fairness (but what does this mean?)
 - Policy (of some kind)
 - Balance/Utilization (keep everything being used)
 - Increasingly: Power (or Energy usage)
- **Usually these are in contradiction...**



4

ETH zürich  

Objectives

- **General:**
 - Fairness
 - Enforcement of policy
 - Balance/Utilization
- **Others depend on workload, or architecture:**
 - Batch jobs, Interactive, Realtime and multimedia
 - SMP, SMT, NUMA, multi-node

5


ETH zürich  

Challenge: Complexity of scheduling algorithms

- **Scheduler needs CPU to decide what to schedule**
 - Any time spent in scheduler is "wasted" time
 - Want to minimize overhead of decisions
 - *To maximise utilization of CPU*
 - But low overhead is no good if your scheduler picks the "wrong" things to run!

⇒ **Trade-off between:**
 scheduler complexity/overhead and
 optimality of resulting schedule

6

ETH zürich  spci.inf.ethz.ch
@spci_eth


Challenge: Frequency of scheduling decisions

- Increased scheduling frequency
⇒ increasing chance of running something different

Leads to higher **context switching rates**,
⇒ **lower throughput**

- Flush pipeline, reload register state
- Maybe flush TLB, caches
- Reduces locality (e.g., in cache)


7

ETH zürich  spci.inf.ethz.ch
@spci_eth

Batch workloads

- “Run this job to completion and tell me when you’re done”
 - Typical mainframe or supercomputer use-case
 - Much used in old textbooks ☹
 - Making a comeback with large clusters...
- Goals:**
 - Throughput (jobs per hour)
 - Wait time (time to execution)
 - Turnaround time (submission to termination)
 - Utilization (don’t waste resources)


8

ETH zürich  spci.inf.ethz.ch
@spci_eth

Interactive workloads

- “Wait for external events, and react before the user gets annoyed”
 - Word processing, browsing, fragging, etc.
 - Common for PCs, phones, etc.
- Goals:**
 - Response time: how quickly does something happen?
 - Proportionality: some things should be quicker


9

ETH zürich  spci.inf.ethz.ch
@spci_eth

Soft Realtime workloads

- “This task must complete in less than 50ms”, or
- “This program must get 10ms CPU every 50ms”
 - Data acquisition, I/O processing
 - Multimedia applications (audio and video)
- Goals:**
 - Deadlines
 - Guarantees
 - Predictability (real time ≠ fast!)


10

ETH zürich  spci.inf.ethz.ch
@spci_eth

Hard Realtime workloads



- “Ensure the plane’s control surfaces move correctly in response to the pilot’s actions”
- “Fire the spark plugs in the car’s engine at the right time”
 - Mission-critical, extremely time-sensitive control applications
- Not covered in this course: very different techniques required...**

11

ETH zürich  spci.inf.ethz.ch
@spci_eth


Scheduling assumptions and definitions

12



ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

CPU- and I/O-bound tasks

CPU-bound task:




13


ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

CPU- and I/O-bound tasks



CPU-bound task:



I/O-bound task:




14


ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

CPU- and I/O-bound tasks



CPU-bound task:



I/O-bound task:





15

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Simplifying assumptions

- **Only one processor**
 - We'll relax this (much) later
- **Processor runs at fixed speed**
 - Realtime == CPU time
 - Not true in reality for power reasons
 - DVFS: Dynamic Voltage and Frequency Scaling
 - In many cases, however, efficiency ⇒ run flat-out until idle.



16

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Simplifying assumptions

- **We only consider work-conserving scheduling**
 - No processor is idle if there is a runnable task
 - Question: is this always a reasonable assumption?
- **The system can always preempt a task**
 - Rules out some very small embedded systems
 - And hard real-time systems...
 - And early PC/Mac OSes...

17

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth



When to schedule?

When:

1. **A running process blocks**
 - e.g., initiates blocking I/O or waits on a child
2. **A blocked process unblocks**
 - I/O completes
3. **A running or waiting process terminates**
4. **An interrupt occurs**
 - I/O or timer

- 2 or 4 can involve *preemption*



18

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Preemption

- **Non-preemptive scheduling:**
 - Require each process to explicitly give up the scheduler
 - Start I/O, executes a "yield()" call, etc.
 - Windows 3.1, older MacOS, some embedded systems
- **Preemptive scheduling:**
 - Processes dispatched and descheduled without warning
 - Often on a timer interrupt, page fault, etc.
 - The most common case in most OSes
 - Soft-realtime systems are usually preemptive
 - Hard-realtime systems are often not!



19

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Overhead

- **Dispatch latency:**
 - Time taken to dispatch a runnable process
- **Scheduling cost**
 $= 2 \times (\text{half context switch}) + (\text{scheduling time})$
- Time slice allocated to a process should be significantly more than scheduling overhead!



20

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Overhead example (from Tanenbaum)

- Suppose process switch time is 1ms
- Run each process for 4ms
 - What is the overhead?



21

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Overhead example (from Tanenbaum)

- Suppose process switch time is 1ms
- Run each process for 4ms
 - ⇒ 20% of system time spent in scheduler ☹
- Run each process for 100ms
 - 50 jobs ⇒ maximum response time?



22

ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Overhead example (from Tanenbaum)

- Suppose process switch time is 1ms
- Run each process for 4ms
 - ⇒ 20% of system time spent in scheduler ☹
- Run each process for 100ms
 - 50 jobs ⇒ response time up to 5 seconds ☹
- Tradeoff: response time vs. scheduling overhead

23


ETH zürich  spoc.inf.ethz.ch
 @spoc_eth

Batch-oriented scheduling

24

Batch scheduling: why bother?

- Mainframes are sooooo 1970!
- But:
 - Most systems have batch-like background tasks
 - Yes, even phones are beginning to.
 - CPU bursts can be modeled as batch jobs
 - Web services are **request-based**




25

First-come first-served

- Simplest algorithm!
- Example:
 - Waiting times: 0, 24, 27
 - Avg. = $(0+24+27)/3 = 17$
- But..

Process	Execution time
A	24
B	3
C	3




26

First-come first-served

- Different arrival order
- Example:
 - Waiting times: 6, 0, 3
 - Avg. = $(0+3+6)/3 = 3$
- Much better ☺
- But unpredictable ☹

Process	Execution time
A	24
B	3
C	3



27

Convoy phenomenon


- Short processes back up behind long-running processes
- Well-known (and widely seen!) problem
 - Famously identified in databases with disk I/O
 - Simple form of self-synchronization
- Generally undesirable...
- FIFO used for, e.g. memcached

28

Shortest-Job First

- Always run process with the shortest execution time.
- Optimal: minimizes waiting time (and hence turnaround time)

Process	Execution time
A	6
B	8
C	7
D	3




29

Optimality

- Consider n jobs executed in sequence, each with processing time t_i , $0 < i < n$
- Mean turnaround time is: $Avg. = \frac{1}{n} \sum_{i=0}^{n-1} (n-i) \cdot t_i$
- Minimized when shortest job is first
- E.g., for 4 jobs: $\frac{(4t_0 + 3t_1 + 2t_2 + t_3)}{4}$


30

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Execution time estimation

- **Problem: what is the execution time?**
 - For mainframes, could punt to user
 - And charge them more if they were wrong
- **For non-batch workloads, use CPU burst times**
 - Keep exponential average of prior bursts
 - cf., TCP RTT estimator $\tau_{n+1} = \alpha \cdot t_n + (1 - \alpha) \cdot \tau_n$
- **Or just use application information**
 - Web pages: size of web page


31

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

SJF & preemption


- **Problem: jobs arrive all the time**
- **“Shortest remaining time next”**
 - New, short jobs may preempt longer jobs already running
- **Still not an ideal match for dynamic, unpredictable workloads**
 - In particular, interactive ones

32

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Scheduling interactive loads


33

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Round-robin

- **Simplest interactive algorithm**
- **Run all runnable tasks for fixed quantum in turn**
- **Advantages:**
 - It's easy to implement
 - It's easy to understand, and analyze
 - Higher turnaround time than SJF, but better *response*
- **Disadvantages:**
 - It's rarely what you want
 - Treats all tasks the same


34

ETH zürich  spoc.inf.ethz.ch
@spoc_eth


Priority

- **Very general class of scheduling algorithms**
- **Assign every task a priority**
- **Dispatch highest priority runnable task**
- **Priorities can be dynamically changed**
- **Schedule processes with same priority using**
 - Round Robin
 - FCFS
 - etc.


35

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Priority queues

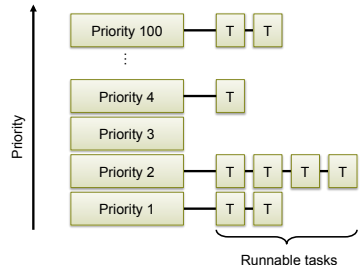


36

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Multi-level queues

- Can schedule different priority levels differently:
 - Interactive, high-priority: round robin
 - Batch, background, low priority: FCFS
- Ideally generalizes to *hierarchical scheduling*


37

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Starvation

- Strict priority schemes do not guarantee progress for all tasks
- Solution: **Ageing**
 - Tasks which have waited a long time are gradually increased in priority
 - Eventually, any starving task ends up with the highest priority
 - Reset priority when quantum is used up


38

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Multilevel Feedback Queues

- Idea: penalize CPU-bound tasks to benefit I/O bound tasks
 - Reduce priority for processes which consume their entire quantum
 - Eventually, re-promote process
 - I/O bound tasks tend to block before using their quantum \Rightarrow remain at high priority
- Very general: any scheduling algorithm can reduce to this (problem is implementation)


39

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Example: Linux o(1) scheduler

- 140 level Multilevel Feedback Queue
 - 0-99 (high priority):
 - static, fixed, "realtime"
 - FCFS or RR
 - 100-139: User tasks, dynamic
 - Round-robin within a priority level
 - Priority ageing for interactive (I/O intensive) tasks
- Complexity of scheduling is independent of no. tasks
 - Two arrays of queues: "runnable" & "waiting"
 - When no more task in "runnable" array, swap arrays


40

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Example: Linux "completely fair scheduler"

- Task's priority = how little progress it has made
 - Adjusted by fudge factors over time
- Implementation uses Red-Black tree
 - Sorted list of tasks
 - Operations now $O(\log n)$, but this is fast
- Essentially, this is the old idea of "fair queuing" from packet networks
 - Also called "generalized processor scheduling"
 - Ensures guaranteed service rate for all processes
 - CFS does not, however, expose (or maintain) the guarantees

41

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Problems with UNIX Scheduling

- UNIX conflates **protection domain** and **resource principal**
 - Priorities and scheduling decisions are per-process
- However, may want to allocate resources across processes, or separate resource allocation within a process
 - E.g., web server structure
 - Multi-process
 - Multi-threaded
 - Event-driven
 - If I run more compiler jobs than you, I get more CPU time
- In-kernel processing is accounted to nobody

42

ETH zürich spoc.inf.ethz.ch @spoc_eth

Resource Containers [Banga et al., 1999]

New OS **abstraction** for explicit resource management, separate from process structure

- Operations to create/destroy, manage hierarchy, and associate threads or sockets with containers
- Independent of scheduling algorithms used
- All kernel operations and resource usage accounted to a resource container

⇒ Explicit and fine-grained control over resource usage
 ⇒ Protects against some forms of DoS attack

- Most obvious modern form: **virtual machines**

43

ETH zürich spoc.inf.ethz.ch @spoc_eth

Real Time

44

ETH zürich spoc.inf.ethz.ch @spoc_eth

Real-time scheduling

- Problem: giving real time-based guarantees to tasks**
 - Tasks can appear at any time
 - Tasks can have deadlines
 - Execution time is generally known
 - Tasks can be periodic or aperiodic
- Must be possible to reject tasks which are unschedulable, or which would result in no feasible schedule**

45

ETH zürich spoc.inf.ethz.ch @spoc_eth

Example: multimedia scheduling

46

ETH zürich spoc.inf.ethz.ch @spoc_eth

Rate-monotonic scheduling

- Schedule periodic tasks by always running task with shortest period first.**
 - Static (offline) scheduling algorithm
- Suppose:**
 - m tasks
 - C_i is the execution time of i'th task
 - P_i is the period of i'th task
- Then RMS will find a feasible schedule if:**

$$\sum_{i=1}^m \frac{C_i}{P_i} \leq m(2^{1/m} - 1)$$
- (Proof is beyond scope of this course)

47


ETH zürich spoc.inf.ethz.ch @spoc_eth

Earliest Deadline First

- Schedule task with earliest deadline first (duh..)**
 - Dynamic, online.
 - Tasks don't *actually* have to be periodic...
 - More complex - $O(n)$ – for scheduling decisions
- EDF will find a feasible schedule if:**

$$\sum_{i=1}^m \frac{C_i}{P_i} \leq 1$$
- Which is very handy. Assuming zero context switch time...

48

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Guaranteeing processor rate


- E.g. you can use EDF to guarantee a rate of progress for a long-running task
 - Break task into periodic jobs, period p and time s .
 - A task arrives at start of a period
 - Deadline is the end of the period
- Provides a **reservation scheduler** which:
 - Ensures task gets s seconds of time every p seconds
 - Approximates weighted fair queuing
- Algorithm is regularly rediscovered...

49

ETH zürich  spoc.inf.ethz.ch
@spoc_eth


Multiprocessor Scheduling

50

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Challenge 1: sequential programs on multiprocessors

- Queuing theory \Rightarrow straightforward, although:
 - More complex than uniprocessor scheduling
 - Harder to analyze




Task queue

Core 0
Core 1
Core 2
Core 3


But...

51

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

It's much harder


- Overhead of **locking and sharing** queue
 - Classic case of scaling bottleneck in OS design
- Solution: per-processor scheduling queues



Core 0
Core 1
Core 2
Core 3

In practice, each is more complex e.g. MFQ


52

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

It's much harder

- Threads allocated arbitrarily to cores
 - \Rightarrow tend to move between cores
 - \Rightarrow tend to move between caches
 - \Rightarrow really bad **locality** and hence performance
- Solution: **affinity scheduling**
 - Keep each thread on a core most of the time
 - Periodically rebalance across cores
 - Note: this is *non-work-conserving!*
- Alternative: hierarchical scheduling (Linux)


53

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Challenge 2: parallel applications

- Global **barriers** in parallel applications \Rightarrow
 - One slow thread has huge effect on performance
 - Corollary of *Amdahl's Law*
- Multiple threads would benefit from cache sharing
- Different applications pollute each others' caches
- Leads to concept of "**co-scheduling**"
 - Try to schedule all threads of an application together
- Critically dependent on **synchronization** concepts


54

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Multicore scheduling

- **Multiprocessor scheduling is two-dimensional**
 - When to schedule a task?
 - Where (which core) to schedule on?
- **General problem is NP hard ☹**
- **But it's worse than that:**
 - Don't want a process holding a lock to sleep
 - ⇒ Might be other running tasks spinning on it
 - Not all cores are equal
- **In general, this is a wide-open research problem**

55

ETH zürich  spoc.inf.ethz.ch
@spoc_eth

Little's Law

- **Assume, in a train station:**
 - 100 people arrive per minute
 - Each person spends 15 minutes in the station
 - How big does the station have to be (house how many people)
- **Little's law: "The average number of active tasks in a system is equal to the average arrival rate multiplied by the average time a task spends in a system"**

56